

N. Duplex Tube



meets ISO-10380

N.1. Features

Thin wall and two ply flexible tube with higher pressure ratings. Its double wall offers additional safety features. Superior in vibration application.

N.2. Standard Material

T321

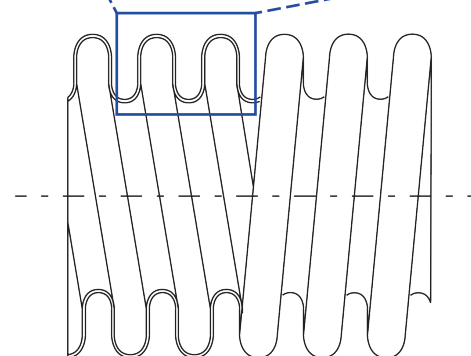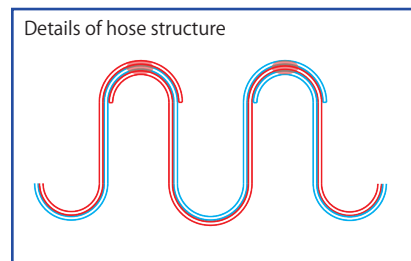

Nominal Diameter (A)	Dimensions		Min. Bend Radius		Weight		Burst Pressure W/ Single Braid (kg/cm ²)
	ID (mm)	OD Tube Only (mm)	Fixed (mm)	Repetitious (mm)	Tube Only (kg/m)	W/Single Braid (kg/m)	
5	5.2	8.6	32	127	0.09	0.15	566
6	6.3	9.4	32	133	0.12	0.2	509
8	8.1	12.4	32	141	0.2	0.2	495
10	10.2	14.2	38	146	0.1	0.3	424
12	12.2	17.0	44	152	0.2	0.3	368
15	16.2	21.1	48	159	0.2	0.5	325
20	20.2	26.4	51	184	0.3	0.6	283
25	25.2	31.5	57	210	0.4	0.7	226
32	32.3	40.6	83	267	0.6	0.9	212
40	40.3	48.5	102	318	0.7	1.3	170
50	50.3	60.5	140	381	1.1	1.8	127
65	65.3	74.4	165	445	1.7	2.5	113
80	80.3	88.1	381	762	1.8	3.0	99
100	100.4	115.1	381	762	2.4	3.9	71